


ABOUT THIS PRODUCT

Consisting of a transparent polyester film coated with yellow rubber-based pressure-sensitive thermosetting adhesive system, this tape is designed for use in masking and splicing applications where heat resistance, conformability and chemical resistance are required.

Conditions: Store in a cool dry place away from sunlight and direct heat sources. As far as the storage conditions are respected, the product is guaranteed for 24 months.

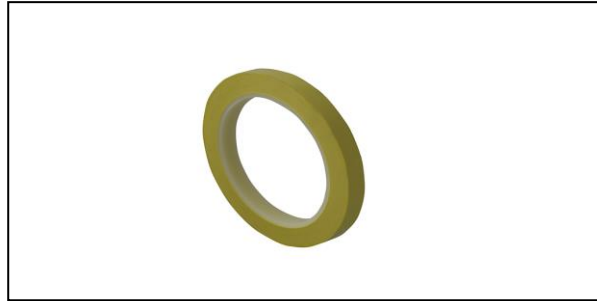

FEATURES AND BENEFITS

- Good temperature resistance
- Good chemical resistance
- Clean and easy to peel after application
- Will not break or tear during application or removal
- Protects against abrasion from rough surfaces, fumes and chemicals
- Flexible backing conforms readily to irregular surfaces
- High performance adhesive resists degradation from chemicals and fumes
 - No residue left on removal

APPLICATIONS

- High temperature masking
 - Mould taping
- Temporary fixing
 - Splicing

MATERIAL DATA

Product Code	300
Material	Polyester with yellow thermosetting adhesive
Carrier Thickness (mm)	0.023
Total Thickness (mm)	0.06
Adhesive	Yellow thermosetting rubber
Adhesion to Steel (N/25mm)	9,5
Adhesion to Backing (N/25mm)	5,5
UL Approval	E178430

TECHNICAL TABLE

Tensile strength (N/25mm)	100
Elongation (%)	90
Temperature Resistance (°C)	UL B / 130
Dielectric Strength (Kv)	4,5