


ABOUT THIS PRODUCT

This range of open slot, lightweight, self-extinguishing rigid PVC trunking is ideal for wiring and routing cables. Ideally suited for control panel wiring, the slots can be easily widened due to a score line running along the base of the fingers.

Trunking is supplied with mounting holes and lid.

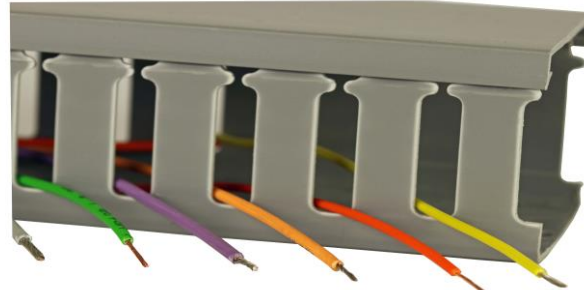

FEATURES AND BENEFITS

- Wide finger and slot design
- Smooth rounded edges
- Restricted slot design-Once inserted wires are retained in the slot
- Non-slip lid
- UL 94 V-0

APPLICATIONS

- Control panels
- Distribution boards
- Switchgear

MATERIAL DATA

Product Code	950
Material	Rigid PVC
Standard Colour	Grey
Width x Height	See Technical Table
Operating Temperature-°C	-40 to + 60 (continuous 50)
Flammability	UL 94 V-0 Rated Material
Slot Type	Open, wide
Relevant Specifications	UL: E306674 CE: EN50085 RoHS, REACH

TECHNICAL TABLE

W x H (external) (mm)	Slot Width (mm)	Finger Width (mm)	Length (m)
30 x 50	8	12	1
40 x 80	8	12	1
50 x 50	8	12	1
60 x 60	8	12	1